


Site Code: MNO12	Location: AREA B	Grid Sq: 115 210	Context Type: MASONRY	Context Number: [2434]
1. Materials	① REDDY PURPLE UNFROGGED BRICK			
2. Size of materials (brick: BTL in mm)	② 100x70x230mm.			
3. Finish of stones	③ N/A.			
4. Coursing / bond	④ ATTEMPT AT ENGLISH BOND IN SMALL AREAS - GENERALLY IRREGULAR.			
5. Form	⑤ APSIDAL BRICK WALL.			
6. Direction of face(s)	⑥ FLAT, UP.			
7. Surface treatment	⑦ NONE.			
8. Bonding material (if brick: record height of 4 courses & 4 bed joints in m)	⑧ PALE YELLOW WHITE SANDY LIME MORTAR. HARD. OCCASIONAL SMALL LIME LUMPS ≤ 10mm; OCCASIONAL SMALL SUB-ANGULAR STONES ≤ 10mm, V. OCCASIONAL CHARCOAL FLECKS ≤ 10mm. 4 COURSES = 0.31m.			
9. Dimensions of masonry as found	⑨ L 2.94m W 0.94m D 1.02m			
10. Other comments	⑩ NONE.			
			(R) 10.50	Max Level: 10.80 m OD
				Min Level: 9.61 m OD

Stratigraphic Relationships:

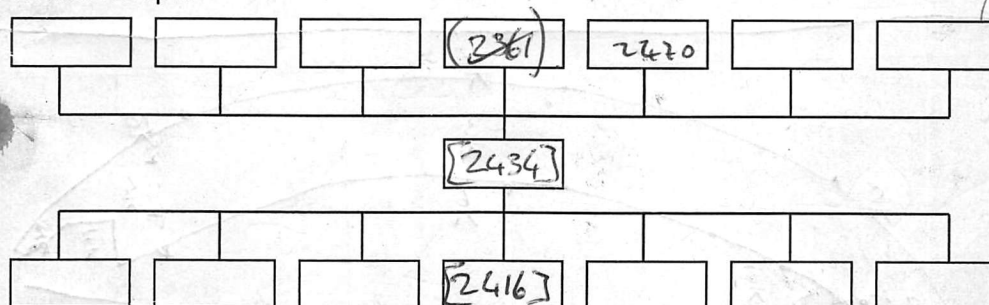

Physical Relationships:

Abuts:	Abutted by: 2430
Cut by: [2405]	

Interpretation:	internal ☒ external ☒
REDDY PURPLE BRICK APSIDAL BRICK WALL.	
E & W ENDS OF APSE'S ARE TRUNCATED BY CUT FOR SEWER [2405].	
WALL HAS IRREGULAR BOND, WITH SMALL SECTIONS BEING ENGLISH BOND, BUT MAJORITY OF WALL IS IRREGULAR BOND. DUE TO THE NATURE OF THE APSE.	
WALL IS x2 COURSES THICK.	
MORTAR IS PALE YELLOW WHITE LIME, WITH FEW INCLUSIONS.	
WALL FORMS APSE OF THE BUILDING WHICH HAD A COBBLED SLOPED FLOOR [2430] DOWN TOWARD APSE. POSSIBLY A STORE BUILDING OF SOME KIND.	
Context same as:	

Sample No(s):	—	Drawing No(s): 2434 (x 1)
Photo No(s):	—	Sketch/levels overleaf: ☒ Transferred to plan: ☒

Compiled by: TS	Date: 03/02/15.	Checked by: — 27/05	Tick when entered in database: ☐
--------------------	--------------------	------------------------	---

(R)

1 = 9.42 5 = 9.31 9 = 10.47
2 = 9.72 6 = 9.32 10 = 10.31
3 = 10.50 7 = 9.41 11 = 9.39
4 = 10.38 8 = 10.48 12 = 9.32

Context Number:

[2434]

Level No.s

Level No.s

Level No.s

Level No.s

TBM 11.80 11.50

TBM

TBM

TBM

B/S 1.18 1.18

B/S

B/S

B/S

IH 12.98 12.68

IH

IH

IH

No.	F/S	R/L (m OD)	No.	F/S	R/L (m OD)	No.	F/S	R/L (m OD)	No.	F/S	R/L (m OD)
1	3.26	9.72	6	3.36	9.62	11		9.69			
2	2.96	10.02	7	3.27	9.71	12		9.62			
3	2.18	10.80	8	2.20	10.78						
4	2.30	10.68	9	2.21	10.77						
5	3.37	9.61	10	2.37	10.61						

